

AK 100 VERTICAL



AK 100/.. DS - 10,0 - V - grey

**2-12 poles, Spacing 10,0 mm
insert required no. of poles ..**

How to order see page 11

AK 100 HORIZONTAL



AK 100/.. DS - 10,0 - H - grey

**2-12 poles, Spacing 10,0 mm
insert required no. of poles ..**

How to order see page 11

Ratings:



Rated voltage	300 V	750 V
Rated current	15 A	24 A (T60)
Wire Size	AWG 22-14	2,5 mm ²
Test voltage		3,5 kV
Rated Torque / Screw Size		0,5 Nm/M3

Max. Rated Cross Section

Single Wire (solid)	2,5 mm ²
Stranded Wire (flexible)	1,5 mm ²
Stranded wire with Ferrules	1,5 mm ²

Dimensions

Spacing	10,0 mm
PCB hole diameter	1,3 mm
Stripped length	7,0 mm

Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	grey
	RAL 7016

Ratings:



Rated voltage	300 V	750 V
Rated current	15 A	24 A (T60)
Wire Size	AWG 22-14	2,5 mm ²
Test voltage		3,5 kV
Rated Torque / Screw Size		0,5 Nm/M3

Max. Rated Cross Section

Single Wire (solid)	2,5 mm ²
Stranded Wire (flexible)	1,5 mm ²
Stranded wire with Ferrules	1,5 mm ²


Dimensions

Spacing	10,0 mm
PCB hole diameter	1,3 mm
Stripped length	6,0 mm

Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	grey
	RAL 7016

AK 100 VERTICAL

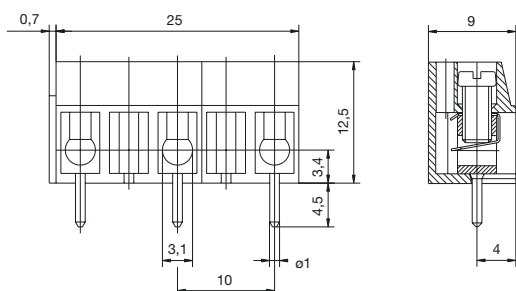

AK 100 HORIZONTAL

