AK 100 VERTICAL

AK 100/.. DS - 10,0 - V - grey - BL

2-6 poles, Spacing 10,0 mm
insert required no. of poles ..
How to order see page 11

Ratings:

Rated voltage	**300 V**	**750 V**
Rated current	**15 A**	**24 A (T60)**
Wire Size	**AWG 22-14**	**2,5 mm²**
Test voltage		**3,5 kV**
Rated Torque / Screw Size		**0,5 Nm/M3**
Max. Rated Cross Section		
Single Wire (solid)		**2,5 mm²**
Stranded Wire (flexible)		**1,5 mm²**
Stranded wire with Ferrules		**1,5 mm²**
Dimensions		
Spacing		**10,0 mm**
PCB hole diameter		**1,3 mm**
Stripped length		**7,0 mm**
Materials		
Insulating material		**PA**
Flammability class		**UL94 V-0**
Temperature range		**-30°C/+105°C**
Terminal block		**CuZn**
Wire guard		**stainless steel**
Colour		
grey		**RAL 7016**

AK 100 VERTICAL

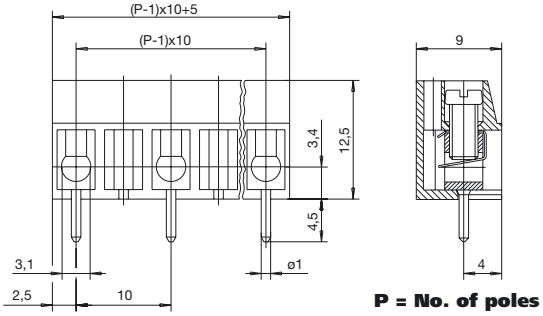

P = No. of poles

AK 100 HORIZONTAL

AK 100/.. DS - 10,0 - H - grey - BL

2-6 poles, Spacing 10,0 mm
insert required no. of poles ..
How to order see page 11

Ratings:

Rated voltage	**300 V**	**750 V**
Rated current	**15 A**	**24 A (T60)**
Wire Size	**AWG 22-14**	**2,5 mm²**
Test voltage		**3,5 kV**
Rated Torque / Screw Size		**0,5 Nm/M3**
Max. Rated Cross Section		
Single Wire (solid)		**2,5 mm²**
Stranded Wire (flexible)		**1,5 mm²**
Stranded wire with Ferrules		**1,5 mm²**
Dimensions		
Spacing		**10,0 mm**
PCB hole diameter		**1,3 mm**
Stripped length		**6,0 mm**
Materials		
Insulating material		**PA**
Flammability class		**UL94 V-0**
Temperature range		**-30°C/+105°C**
Terminal block		**CuZn**
Wire guard		**stainless steel**
Colour		
grey		**RAL 7016**

AK 100 HORIZONTAL

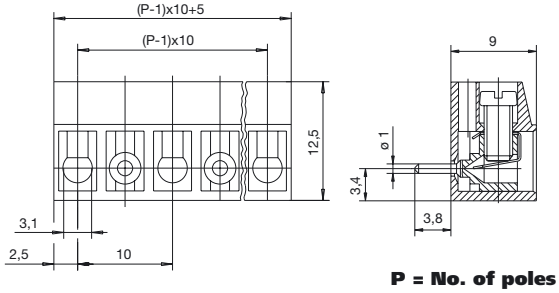

P = No. of poles