

AK 104/.. DS - 5,0 - V - grey

2-12 poles, Spacing 5,0 mm
insert required no. of poles ..

How to order see page 11

Ratings:



Rated voltage	300 V	250 V
Rated current	10 A	32 A (T60)
Wire Size	AWG 22-12	4,0 mm ²
Test voltage		2,0 kV
Rated Torque / Screw Size		0,8 Nm/M3

Max. Rated Cross Section

Single Wire (solid)	4,0 mm ²
Stranded Wire (flexible)	2,5 mm ²
Stranded wire with Ferrules	1,5 mm ²


Dimensions

Spacing	5,0 mm
PCB hole diameter x pitch	2,0 mm x 2,8 mm
Stripped length	7,0 mm

Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	grey
	RAL 7016

AK 104 VERTICAL

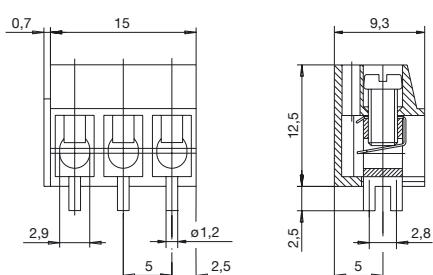

AK 110/.. DS - 7,5 - V - grey

2-12 poles, Spacing 7,5 mm
insert required no. of poles ..

How to order see page 11

Ratings:



Rated voltage	300 V	500 V
Rated current	20 A	24 A (T60)
Wire Size	AWG 22-14	2,5 mm ²
Test voltage		3,0 kV
Rated Torque / Screw Size		0,5 Nm/M3

Max. Rated Cross Section

Single Wire (solid)	2,5 mm ²
Stranded Wire (flexible)	1,5 mm ²
Stranded wire with Ferrules	1,5 mm ²

Dimensions

Spacing	7,5 mm
PCB hole diameter x pitch	1,3 mm
Stripped length	7,0 mm

Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	grey
	RAL 7016

AK 110 VERTICAL

