

AK(Z) 1550





**AK(Z) 1550/.. - 3,5 (3,81) - green**

**2-20 poles, Spacing 3,5 mm and 3,81 mm  
insert required no. of poles ..**

How to order see page 11

**Ratings:**

		
Rated Voltage	300 V	160 V
Rated Current	8 A	9 A (T60)
Overvoltage Category		III
Wire Size	AWG 28-16	1,5 mm <sup>2</sup>
Rating Impulse Voltage/Dirt Level		2,5 kV/3
Rated Torque / Screw Size		0,4 Nm/M2

**Max. Rated Cross Section**

Single Wire (solid)	1,5 mm <sup>2</sup>
Stranded Wire (flexible)	1,0 mm <sup>2</sup>
Stranded wire with Ferrules	1,0 mm <sup>2</sup>


**Dimensions**

Spacing	3,5 mm (3,81 mm)
Stripped Length	7,0 mm


**Materials**

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn
Colour	green
	RAL 6018

**AK(Z) 1550**

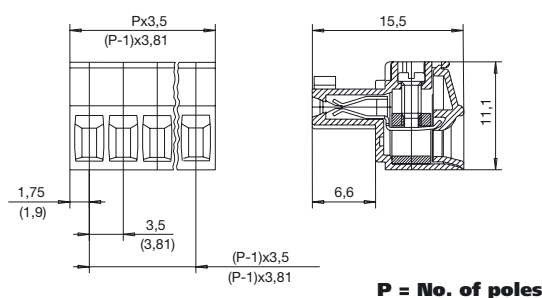

AK(Z) 1550

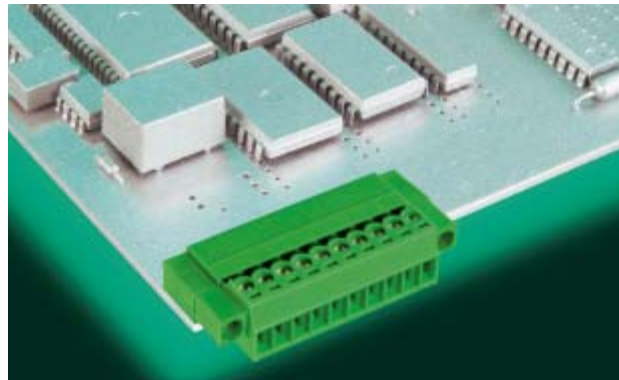



**AK(Z) 1550/.. F - 3,5 (3,81) - green**

**2-20 poles, Spacing 3,5 mm and 3,81 mm  
insert required no. of poles ..**

How to order see page 11

**Ratings:**

		
Rated Voltage	300 V	160 V
Rated Current	8 A	9 A (T60)
Overvoltage Category		III
Wire Size	AWG 28-16	1,5 mm <sup>2</sup>
Rating Impulse Voltage/Dirt Level		2,5 kV/3
Rated Torque / Screw Size		0,4 Nm/M2

**Max. Rated Cross Section**

Single Wire (solid)	1,5 mm <sup>2</sup>
Stranded Wire (flexible)	1,0 mm <sup>2</sup>
Stranded wire with Ferrules	1,0 mm <sup>2</sup>

**Dimensions**

Spacing	3,5 mm (3,81 mm)
Stripped Length	7,0 mm

**Materials**

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn
Colour	green
	RAL 6018

**AK(Z) 1550 Flange**

