


**AK 360 VERTICAL**

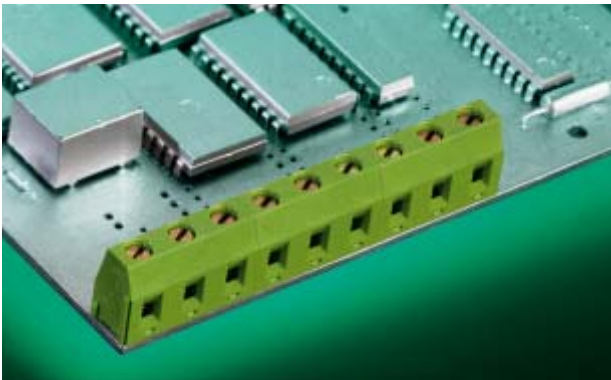


**AK 360/.. - 7,5 - V - green**

**2-12 poles, Spacing 7,5 mm  
insert required no. of poles ..**

How to order see page 11

**AK 360 HORIZONTAL**

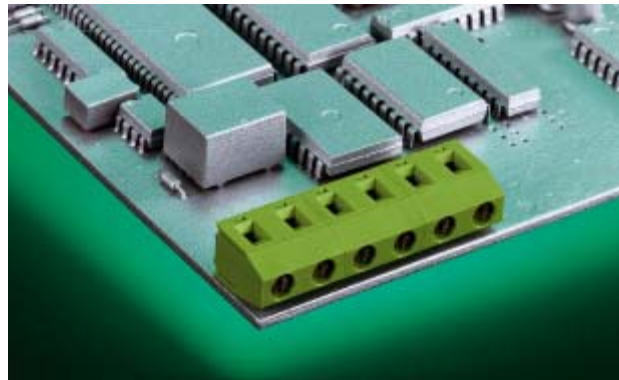

**AK 360/.. - 7,5 - H - green**

**2-12 poles, Spacing 7,5 mm  
insert required no. of poles ..**

How to order see page 11

**Ratings:**



Rated Voltage	300 V	750 V
Rated Current	16 A	24 A (T60)
Wire Size	AWG 22-12	2,5 mm <sup>2</sup>
Test Voltage		3,0 kV
Rated Torque / Screw Size		0,5 Nm/M3

**Max. Rated Cross Section**

Single Wired (solid)	2,5 mm <sup>2</sup>
Stranded Wire (flexible)	1,5 mm <sup>2</sup>
Stranded wire with Ferrules	1,5 mm <sup>2</sup>

**Dimensions**

Spacing	7,5 mm
PCB Hole Diameter	1,3 mm
Stripped Length	6,0 mm

**Materials**

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu
Colour	green
	RAL 6018

**Ratings:**



Rated Voltage	300 V	750 V
Rated Current	16 A	24 A (T60)
Wire Size	AWG 22-12	2,5 mm <sup>2</sup>
Test Voltage		3,0 kV
Rated Torque / Screw Size		0,5 Nm/M3

**Max. Rated Cross Section**

Single Wired (solid)	2,5 mm <sup>2</sup>
Stranded Wire (flexible)	1,5 mm <sup>2</sup>
Stranded wire with Ferrules	1,5 mm <sup>2</sup>


**Dimensions**

Spacing	7,5 mm
PCB Hole Diameter	1,3 mm
Stripped Length	6,0 mm

**Materials**

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu
Colour	green
	RAL 6018

**AK 360 VERTICAL**

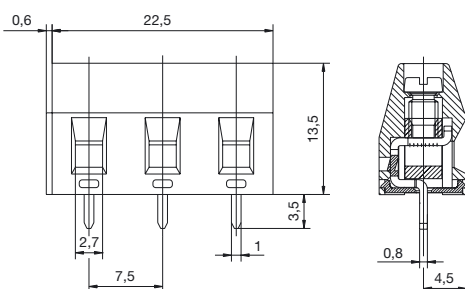

**AK 360 HORIZONTAL**

