
**AK(Z) 3750/.. - 5,0 (5,08) - green**



**1-n poles, Spacing 5,0 mm (5,08 mm)**  
**insert required no. of poles ..**

How to order see page 11

available pin positions on request

**Ratings:**

\*factory wiring

		
Rated Voltage	300 V	250 V
Rated Current	16 A*	12 A (T60)
Wire Size	AWG 28-14	2,5 mm <sup>2</sup>
Test Voltage		2 kV

**Max. Rated Cross Section**

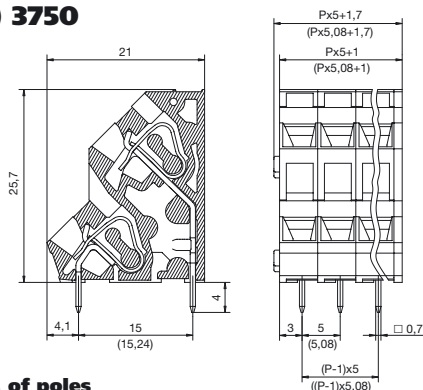
Single Wired (solid)	2,5 mm <sup>2</sup>
Stranded Wire (flexible)	2,5 mm <sup>2</sup>
Stranded Wire with Ferrules	1,5 mm <sup>2</sup>

**Dimensions**

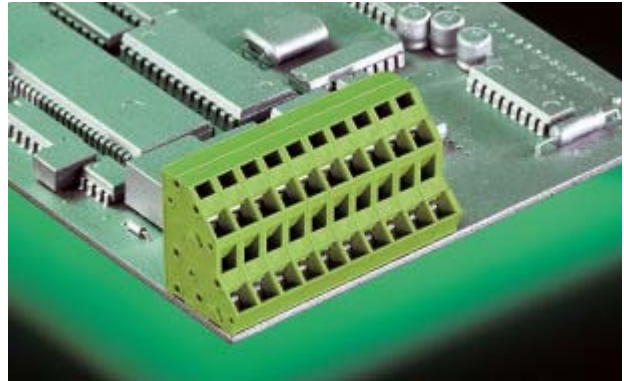
Spacing	5,0 mm (5,08 mm)
PCB Hole Diameter	1,0 mm (2x)
Stripped Length	6,0 mm

**Materials**

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Cage Clamp	stainless steel
Wire Guard	Cu
Colour	green
	RAL 6018

**AK(Z) 3750**


**P = No. of poles**


**AK(Z) 3750/..VP - 5,0 (5,08) - green**



**1-n poles, Spacing 5,0 mm (5,08 mm)**  
**insert required no. of poles ..**

How to order see page 11

available pin positions on request

**Ratings:**

\*factory wiring

		
Rated Voltage	300 V	250 V
Rated Current	16 A*	12 A (T60)
Wire Size	AWG 28-14	2,5 mm <sup>2</sup>
Test Voltage		2 kV

**Max. Rated Cross Section**

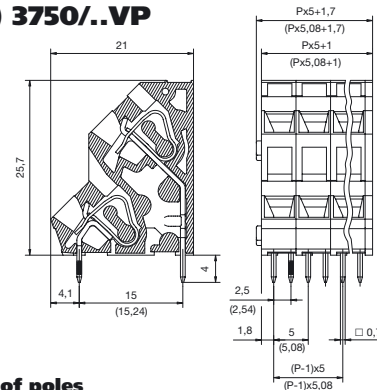
Single Wire (solid)	2,5 mm <sup>2</sup>
Stranded Wire (flexible)	2,5 mm <sup>2</sup>
Stranded Wire with Ferrules	1,5 mm <sup>2</sup>

**Dimensions**

Spacing	5,0 mm (5,08 mm)
PCB Hole Diameter	1,0 mm (2x)
Stripped Length	6,0 mm

**Materials**

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Cage Clamp	stainless steel
Wire Guard	Cu
Colour	green
	RAL 6018

**AK(Z) 3750/..VP**


**P = No. of poles**