





**PTR**

A Phoenix Mecano Company

**THR-Variant**

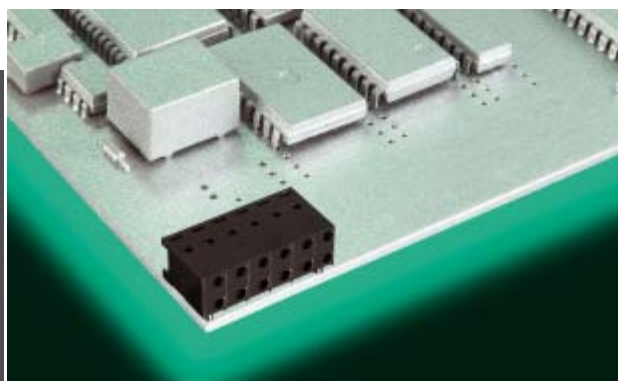

**THR-Variant**

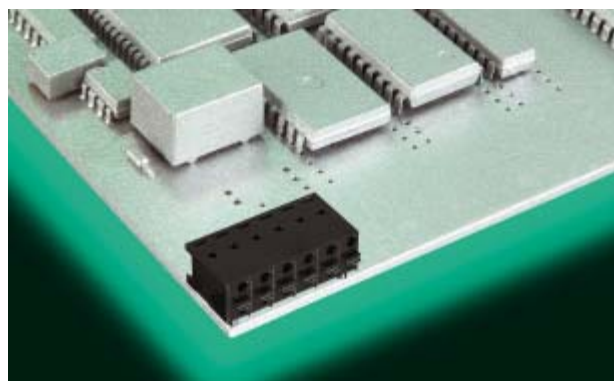

AK 4400

AK 4401

**AK 4400/.. ST - 3,5 - black - HT**

**AK 4401/.. KDST - 3,5 - black - HT**

**2-16 poles, Spacing 3,5 mm  
insert required no. of poles ..**

**2-16 poles, Spacing 3,5 mm  
insert required no. of poles ..**

How to order see page 11

How to order see page 11



**Ratings:**

\*approval pending

	* 	* 
Rated Voltage	150 V	160 V
Rated Current	4 A	4 A (T60)
Overvoltage Category		III
Wire Size	AWG 22-20 s	0,5 mm <sup>2</sup> s
Rating Impulse Voltage / Dirt Level		2,5 kV/3

**Ratings:**

\*approval pending

	* 	* 
Rated Voltage	150 V	160 V
Rated Current	4 A	4 A (T60)
Overvoltage Category		III
Wire Size	AWG 22-20 s	0,5 mm <sup>2</sup> s
Rating Impulse Voltage / Dirt Level		2,5 kV/3

**Max. Rated Cross Section**

Single Wire (solid) 0,5 mm<sup>2</sup>

**Max. Rated Cross Section**

Single Wire (solid) 0,5 mm<sup>2</sup>

**Dimensions**

Spacing 3,5 mm  
Stripped Length 5,5 mm

**Dimensions**

Spacing 3,5 mm  
Stripped Length 5,5 mm


**Materials**

Insulating Material LCP  
Flammability Class UL94 V-0  
Temperature Range -30°C/+105°C  
Terminal Block stainless steel  
Contact stainless steel  
Colour black

**Materials**


Insulating Material LCP  
Flammability Class UL94 V-0  
Temperature Range -30°C/+105°C  
Terminal Block stainless steel  
Contact stainless steel  
Colour black

**AK 4400**

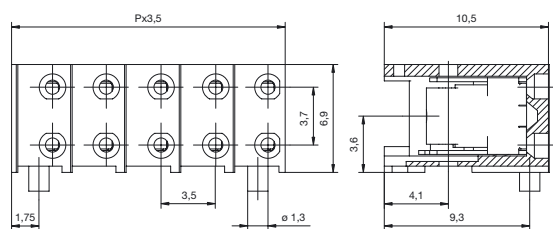

**P = No. of poles**

**AK 4401**

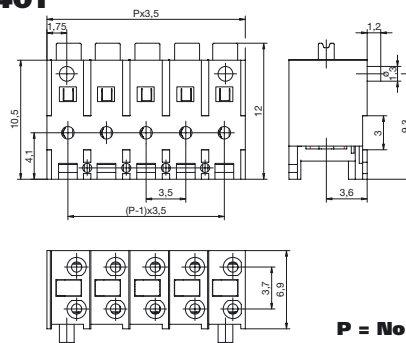

**P = No. of poles**