




**PTR**

A Phoenix Mecano Company

**THR-Variant**

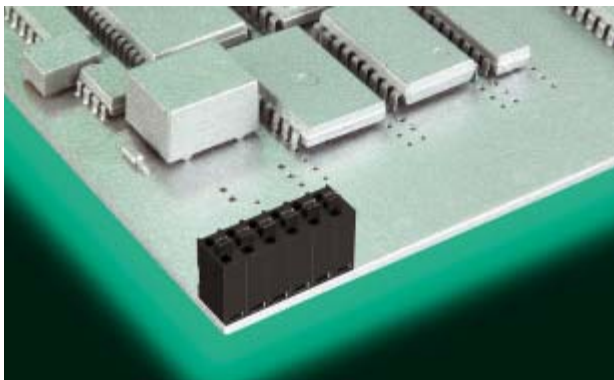

**THR-Variant**



**AK 4401 VERTICAL**

**AK 4401 HORIZONTAL**

**AK 4401/.. KD - 3,5 - V - black - HT**

**AK 4401/.. KD - 3,5 - H - black - HT**

**2-16 poles, Spacing 3,5 mm  
insert required no. of poles ..**

**2-16 poles, Spacing 3,5 mm  
insert required no. of poles ..**

How to order see page 11

How to order see page 11

**Ratings:**

\*approval pending



Rated Voltage	150 V	130 V
Rated Current	4 A	4 A (T60)
Wire Size	AWG 22-20 s	0,5 mm <sup>2</sup> s
Test Voltage		1,25 kV

**Ratings:**

\*approval pending



Rated Voltage	150 V	130 V
Rated Current	4 A	4 A (T60)
Wire Size	AWG 22-20 s	0,5 mm <sup>2</sup> s
Test Voltage		1,25 kV

**Max. Rated Cross Section**

Single Wire (solid) 0,5 mm<sup>2</sup>

**Max. Rated Cross Section**

Single Wire (solid) 0,5 mm<sup>2</sup>

**Dimensions**

Spacing 3,5 mm  
Stripped Length 5,5 mm

**Dimensions**

Spacing 3,5 mm  
Stripped Length 5,5 mm

**Materials**

Insulating Material LCP  
Flammability Class UL94 V-0  
Temperature Range -30°C/+105°C  
Tension Spring stainless steel  
Contact stainless steel


**Materials**

Insulating Material LCP  
Flammability Class UL94 V-0  
Temperature Range -30°C/+105°C  
Tension Spring stainless steel  
Contact stainless steel

**Colour**  
black


**Colour**  
black

**AK 4401 VERTICAL**



**P = No. of poles**

**AK 4401 HORIZONTAL**

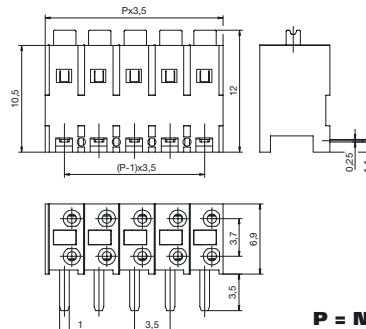

**P = No. of poles**