





AK(Z) 500/.. DS - 10,0 (10,16) - V - grey

**2-12 poles, Spacing 10,0 mm or 10,16 mm
insert required no. of poles ..**

How to order see page 11

Ratings:

		
Rated voltage	300 V	750 V
Rated current	15 A	17,5 A (T60)
Wire Size	AWG 22-14	1,5 mm ²
Test voltage		3,0 kV
Rated Torque / Screw Size		0,4 Nm/M2,6

Max. Rated Cross Section

Single Wire (solid)	1,5 mm ²
Stranded Wire (flexible)	1,5 mm ²
Stranded wire with Ferrules	0,75 mm ²



Maße

Spacing	10,0 mm (10,16 mm)
PCB hole diameter	1,3 mm
Stripped length	6,0 mm

Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	grey
	RAL 7016

AK(Z) 500 VERTICAL

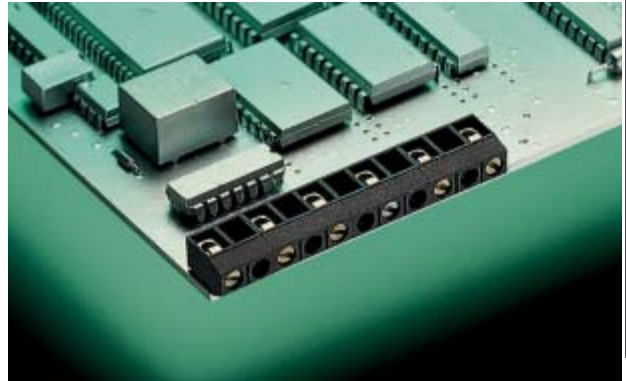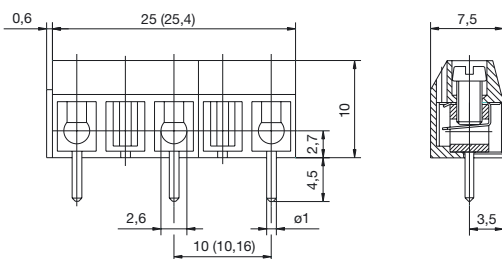



AK(Z) 500/.. DS - 10,0 (10,16) - H - grey

**2-12 poles, Spacing 10,0 mm or 10,16 mm
insert required no. of poles ..**

How to order see page 11

Ratings:

		
Rated voltage	300 V	750 V
Rated current	15 A	17,5 A (T60)
Wire Size	AWG 22-14	1,5 mm ²
Test voltage		3,5 kV
Rated Torque / Screw Size		0,4 Nm/M2,6

Max. Rated Cross Section

Single Wire (solid)	1,5 mm ²
Stranded Wire (flexible)	1,5 mm ²
Stranded wire with Ferrules	0,75 mm ²

Dimensions

Spacing	10,0 mm (10,16 mm)
PCB hole diameter	1,3 mm
Stripped length	5,0 mm

Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	grey
	RAL 7016

AK(Z) 500 HORIZONTAL

