

AK 550 VERTICAL




AK 550/.. DS - 7,0 - V - grey

**2-8 poles, Spacing 7,0 mm
insert required no. of poles ..**

How to order see page 11

AK 550 HORIZONTAL

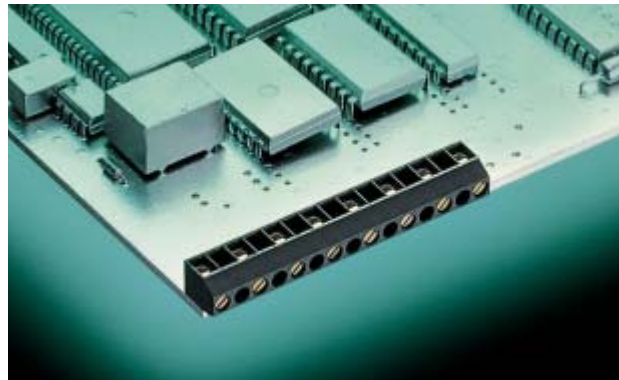

AK 550/.. DS - 7,0 - H - grey

**2-8 poles, Spacing 7,0 mm
insert required no. of poles ..**

How to order see page 11

Ratings:



Rated Voltage	300 V	450 V
Rated Current	6 A	13,5 A (T60)
Wire Size	AWG 28-16	1,0 mm ²
Test Voltage		2,5 kV
Rated Torque / Screw Size		0,4 Nm/M2

Max. Rated Cross Section

Single Wired (solid)	1,5 mm ²
Stranded Wire (flexible)	1,0 mm ²
Stranded wire with Ferrules	0,75 mm ²

Dimensions

Spacing	7,0 mm
PCB Hole Diameter	1,2 mm
Stripped Length	5,5 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	stainless steel
Colour	grey
	RAL 7016

Ratings:



Rated Voltage	300 V	450 V
Rated Current	6 A	13,5 A (T60)
Wire Size	AWG 28-16	1,0 mm ²
Test Voltage		2,5 kV
Rated Torque / Screw Size		0,4 Nm/M2

Max. Rated Cross Section

Single Wired (solid)	1,5 mm ²
Stranded Wire (flexible)	1,0 mm ²
Stranded wire with Ferrules	0,75 mm ²


Dimensions

Spacing	7,0 mm
PCB Hole Diameter	1,2 mm
Stripped Length	5,5 mm

Materials


Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	stainless steel
Colour	grey
	RAL 7016

AK 550 VERTICAL

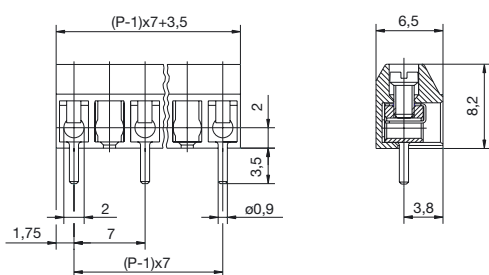

P = No. of poles

AK 550 HORIZONTAL

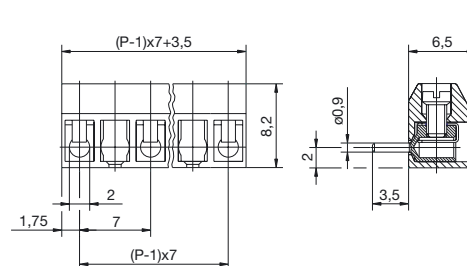

P = No. of poles