



AK 590/.. DS- 5,0 - grey

2-12 poles, Spacing 5,0 mm
insert required no. of poles ..

How to order see page 11

Ratings:

		
Rated Voltage	300 V	250 V
Rated Current	15 A	17,5 A (T60)
Wire Size	AWG 22-14	1,5 mm ²
Test Voltage		2,0 kV
Rated Torque / Screw Size		0,4 Nm/M2,6

Max. Rated Cross Section

Single Wired (solid)	1,5 mm ²
Stranded Wire (flexible)	1,5 mm ²
Stranded wire with Ferrules	0,75 mm ²


Dimensions

Spacing	5,0 mm
PCB Hole Diameter	1,3 mm
Stripped Length	6,0 mm


Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	stainless steel
Colour	grey
	RAL 7016

AK 590

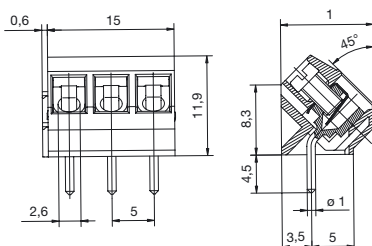

Cage Clamp Principle

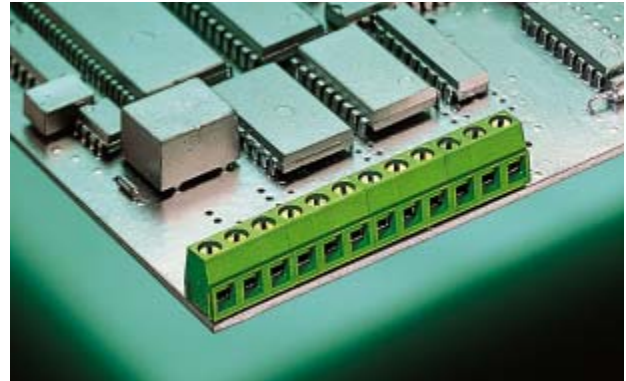



AKZ 250/.. - 5,08 - V - green

2-12 poles, Spacing 5,08 mm
insert required no. of poles ..

How to order see page 11

Ratings:

		
Rated Voltage	300 V	250 V
Rated Current	15 A	13 A (T60)
Wire Size	AWG 28-14	1,5 mm ²
Test Voltage		2,0 kV
Rated Torque / Screw Size		0,5 Nm/M3

Max. Rated Cross Section

Single Wired (solid)	1,5 mm ²
Stranded Wire (flexible)	1,5 mm ²
Stranded wire with Ferrules	1,5 mm ²

Dimensions

Spacing	5,08 mm
PCB Hole Diameter	1,3 mm
Stripped Length	6,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu
Colour	green
	RAL 6018

AKZ 250 VERTICAL

