

AK 130




**AK 130/.. - 10,0 - grey**

**2-6 poles, Spacing 10,0 mm  
insert required no. of poles ..**

How to order see page 11

AK(Z) 130

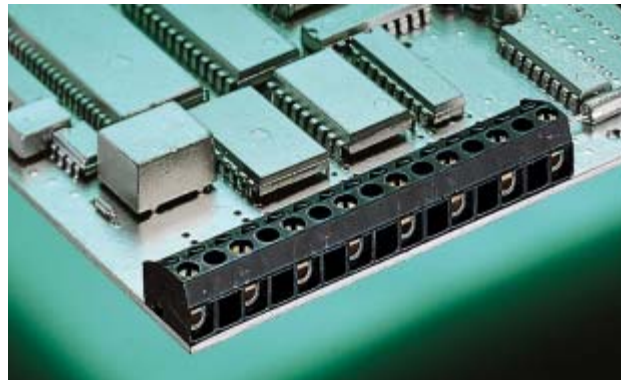

**AK(Z) 130/.. - 10,0 (10,16) - grey - BL**

**2-8 poles, Spacing 10,0 mm or 10,16 mm  
insert required no. of poles ..**

How to order see page 11

**Ratings:**

\* factory wiring



Rated Voltage	300 V	630 V
Rated Current	10 A*	10 A (T55)
Overtoltage Category		III
Wire Size	AWG 22-14	1,5 mm <sup>2</sup>
Rating Impulse Voltage/Dirt Level		6 kV/3
Rated Torque / Screw Size		0,4 Nm/M2,6

**Max. Rated Cross Section**

Single Wire (solid)	1,5 mm <sup>2</sup>
Stranded Wire (flexible)	1,0 mm <sup>2</sup>
Stranded wire with Ferrules	1,0 mm <sup>2</sup>

**Dimensions**

Spacing	10,0 mm
Stripped Length	6,0 mm

**Materials**

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuBe
Colour	grey
	RAL 7016

**Ratings:**

\* factory wiring



Rated Voltage	300 V	630 V
Rated Current	10 A*	10 A (T55)
Overtoltage Category		III
Wire Size	AWG 22-14	1,5 mm <sup>2</sup>
Rating Impulse Voltage/Dirt Level		6 kV/3
Rated Torque / Screw Size		0,4 Nm/M2,6

**Max. Rated Cross Section**

Single Wire (solid)	1,5 mm <sup>2</sup>
Stranded Wire (flexible)	1,0 mm <sup>2</sup>
Stranded wire with Ferrules	1,0 mm <sup>2</sup>


**Dimensions**

Spacing	10,0 mm (10,16 mm)
Stripped Length	6,0 mm


**Materials**

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuBe
Colour	grey
	RAL 7016

**AK 130**

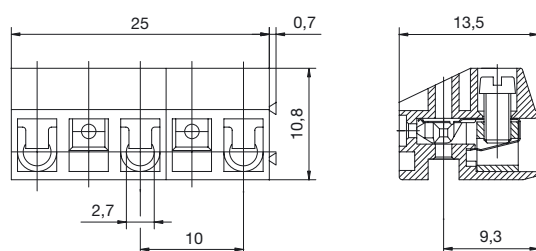

**AK(Z) 130**

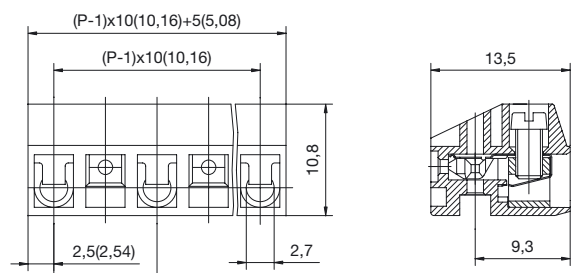

**P = No. of poles**