


Spring Terminal Principle

AK 3950



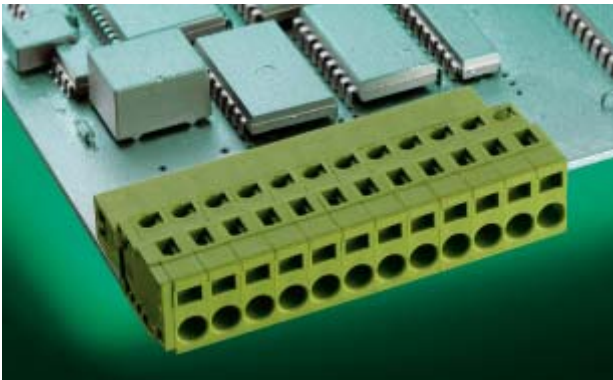

AK 3950/.. - 5,0 - green

1-24 poles, Spacing 5,0 mm
insert required no. of poles ..

How to order see page 11

Ratings:

		
Rated Voltage	300 V	250 V
Rated Current	15 A	12 A (T60)
Overtoltage Category		III
Wire Size	AWG 28-12	2,5 mm ²
Rating Impulse Voltage / Dirt Level		4 kV/3

Max. Rated Cross Section

Single Wire (solid)	2,5 mm ²
Stranded Wire (flexible)	2,5 mm ²
Stranded wire with Ferrules	1,5 mm ²


Dimensions

Spacing	5,0 mm
Stripped Length	8,5 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Cage clamp	stainless steel
Contact	Cu
Colour	
green	RAL 6018

AK 3950

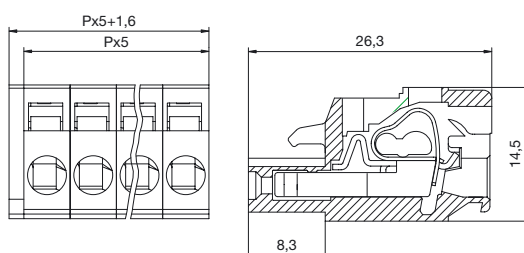

P = No. of poles

Projects

We plan and compile
the optimal solution
for your project.