




PTR

A Phoenix Mecano Company

AKZS 950/FMB

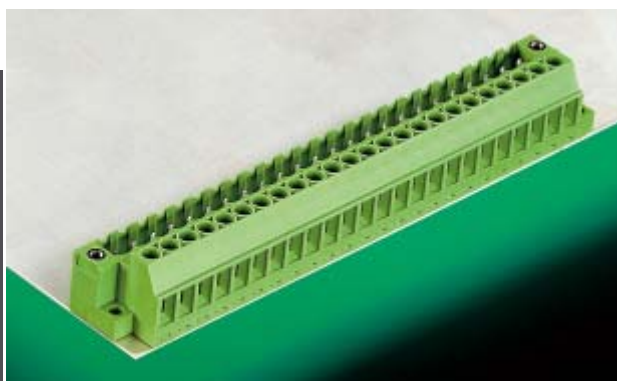

AKZS 950/..FMB - 5,08 - green

2-24 poles, Spacing 5,08 mm
insert required no. of poles ..

How to order see page 11

AKZ 960



AKZ 960/.. - 7,62 - green

2-16 poles, Spacing 7,62 mm
insert required no. of poles ..

How to order see page 11

Ratings:



Rated Voltage	300 V	250 V
Rated Current	15 A	12 A (T60)
Oversvoltage Category		III
Wire Size	AWG 28-12	2,5 mm ²
Rating Impulse Voltage / Dirt Level		4 kV / 3
Rated Torque / Screw Size		0,5 Nm/M3

Max. Rated Cross Section

Single Wire (solid)	2,5 mm ²
Stranded Wire (flexible)	2,5 mm ²
Stranded Wire with Ferrules	2,5 mm ²

Dimensions

Spacing	5,08 mm
Stripped Length	6,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu
Colour	green
	RAL 6018

Ratings:

*factory wiring



Rated Voltage	300 V	400 V
Rated Current	15 A	12 A (T60)
Oversvoltage Category		III
Wire Size	*AWG 28-12	2,5 mm ²
Rating Impulse Voltage/Dirt Level		6 kV/3
Rated Torque / Screw Size		0,5 Nm/M3

Max. Rated Cross Section

Single Wire (solid)	2,5 mm ²
Stranded Wire (flexible)	2,5 mm ²
Stranded wire with Ferrules	2,5 mm ²


Dimensions

Spacing	7,62 mm
Stripped Length	6,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu
Contact	CuSn
Colour	green
	RAL 6018

AKZS 950/..FMB

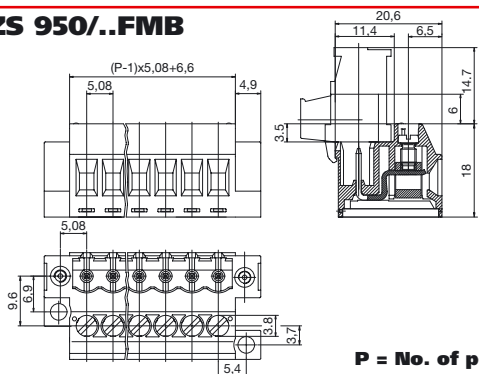

AKZ 960

