



STL 132/.. - 5,0 - V - black

**2-24 poles, Spacing 5,0 mm
insert required no. of poles ..**

How to order see page 11

Ratings:

Rated Voltage	300 V	250 V
Rated Current	10 A	10 A (T55)
Oversvoltage Category		III
Rating Impulse Voltage/Dirt Level		4 kV/3

Dimensions

Spacing	5,0 mm
PCB Hole Diameter	1,2 mm


Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	CuZn

Colour

black	RAL 9011
-------	----------

STL 132 VERTICAL

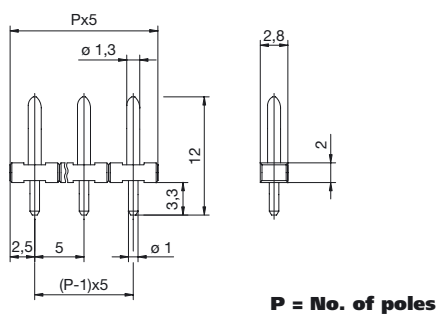

THR-Variant



STL 132/.. - 5,0 - V - black - HT

**2-24 poles, Spacing 5,0 mm
insert required no. of poles ..**

How to order see page 11

Ratings:

Rated Voltage	300 V	250 V
Rated Current	10 A	10 A (T55)
Oversvoltage Category		III
Rating Impulse Voltage/Dirt Level		4 kV/2

Dimensions

Spacing	5,0 mm
PCB Hole Diameter	1,2 mm

Materials

Insulating Material	LCP
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	CuZn

Colour

black

STL 132 VERTICAL

