




PTR

A Phoenix Mecano Company

STL(Z) 950 HORIZONTAL

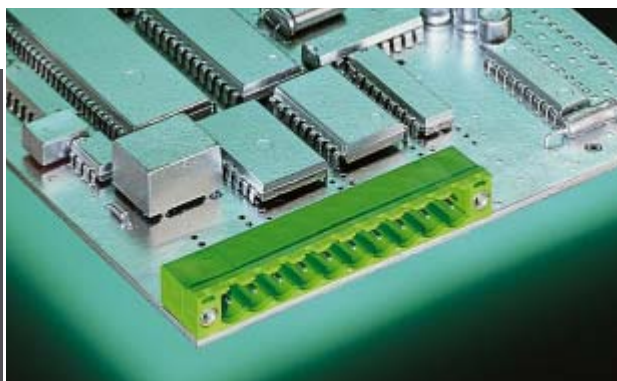


STL(Z) 950/.. F - 5,0 (5,08) - H - green

**2-24 poles, Spacing 5,0 mm or 5,08 mm
insert required no. of poles ..**

How to order see page 11

AKZS 950/G

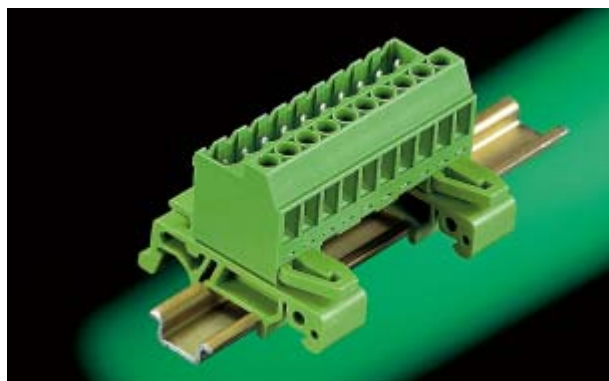

AKZS 950/..G - 5,08 - green

**2-24 poles, Spacing 5,08 mm
insert required no. of poles ..**

mountable in combination with TS 15 and TS 35

How to order see page 11

Ratings:

Rated Voltage	300 V	250 V
Rated Current	15 A	12 A (T60)
Overvoltage Category		III
Rating Impulse Voltage/Dirt Level		4 kV/3

Ratings:

Rated Voltage	300 V	250 V
Rated Current	15 A	12 A (T60)
Overvoltage Category		III
Wire Size	AWG 28-12	2,5 mm ²
Rating Impulse Voltage / Dirt Level		4 kV / 3
Rated Torque / Screw Size		0,5 Nm/M3

Dimensions

Spacing	5,0 mm (5,08 mm)
PCB Hole Diameter	1,4 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu

Colour

green	RAL 6018
-------	----------

Max. Rated Cross Section

Single Wire (solid)	2,5 mm ²
Stranded Wire (flexible)	2,5 mm ²
Stranded Wire with Ferrules	2,5 mm ²

Dimensions

Spacing	5,08 mm
Stripped Length	6,0 mm
DIN Rail	TS 15 DIN EN 60715 TS 35 DIN EN 60715


Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu

Colour

green	RAL 6018
-------	----------

STL(Z) 950 HORIZONTAL Flange

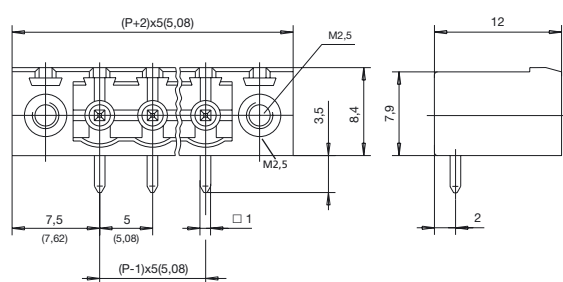

AKZS 950/..G

